

JS 100 Series Tracked Excavators T4i

[Section 1 - General Information](#)

[Section 2 - Operator's Manual](#)

[Section B - Body and Framework](#)

[Section C - Electrics](#)

[Section E - Hydraulics](#)

[Section F - Transmission](#)

[Section J - Track & Running Gear](#)

[Section K - Engine](#)



Publication No.
9813/2200-4



World Class
Customer Support

Noise Emissions

General

To assist in compliance with European Directives 2000/14/EC and 2005/88/EC, the noise data values for this type of machine have been provided on the following page(s) and may be used for the assessment of risks to exposure from noise.

The noise data values shown only apply to CE marked machines.

For information relating to this machine when used with other JCB approved attachments, please refer to the literature accompanying the attachments.

Table 1. Definition of terms

Term	Definition	Notes
LpA	A-weighted sound pressure level measured at the operator's station.	Determined in accordance with the test method defined in ISO 6396 and the dynamic test conditions defined on 2000/14/EC.
LwA	Equivalent A-weighted sound power level emitted by the machine.	Guaranteed equivalent sound power (external noise) determined in accordance with the dynamic test conditions defined in 2000/14/EC.

Noise Data

For: JS115, JS130, JS145,	Page 334
For: JS160, JS180, JS190	Page 334
For: JS200, JS210, JS220, JS235	Page 334

(For: JS115, JS130, JS145,)

Table 1. All Machines

Engine rating ⁽¹⁾	LpA	LwA
74kW	72	100
81kW	72	100

(1) Net installed power.

(For: JS160, JS180, JS190)

Table 2.

Engine rating ⁽¹⁾	LpA	LwA
93kW	71	100
97kW	73	100

(1) Net installed power.

(For: JS200, JS210, JS220, JS235)

Table 3.

Engine rating ⁽¹⁾	LpA	LwA
129kW	73	102

(1) Net installed power.

Vibration Emissions

General


To assist in compliance with the European Directive 2002/44/EC, the duty specific vibration emission values for this machine type have been provided on the following page(s) and may be used for the assessment of risks to exposure from vibration.

Unless otherwise indicated for a specific operating condition, the vibration values are calculated with the machine equipped with the standard attachments (for example bucket, shovel, fork, etc.) for the respective operating condition.

The vibration values are calculated from measurements in three perpendicular axes (X, Y and Z). The highest weighted (RMS (Root Mean Square)) value is used to specify the vibration emission.

The axis upon which the highest weighted (RMS) value occurs is shown on the vibration chart for each of the machine operating duties, see dominant axis (X, Y or Z).

Figure 362.

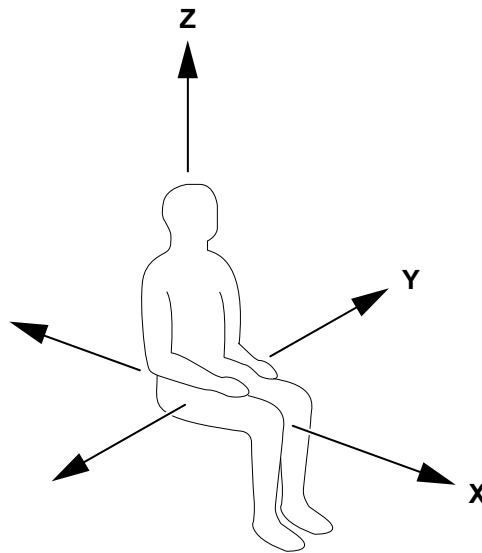

Exposure to Vibration

Exposure to vibration can be minimised through:


- Selection of the correct size and capacity of machine, equipment and attachments for a particular application
- Use of a machine equipped with an appropriate seat, keeping the seat maintained and adjusted
- Checks to make sure that the machine is correctly maintained, reporting and correcting any faults
- Steering, braking, accelerating, shifting gears, moving the attachments and load smoothly
- Adjusting the machine speed and travel path to minimise the vibration level
- Keeping the terrain on worksites where the machine works and travels in good condition, removing any large rocks or obstacles and filling in any ditches and holes
- Choosing routes that avoid rough surfaces and, if this is not possible, drive more slowly to avoid bumping and jolting
- Travel over longer distances at an adjusted (medium) speed
- Avoiding bad postures, i.e. slumping in your seat, constantly leaning forward or sideways or driving with your back twisted.

Vibration Data

For: JS115, JS130, JS145,	Page 336
For: JS160, JS180, JS190	Page 337
For: JS330	Page 337
For: JS200, JS210, JS220, JS235	Page 338
For: JS360	Page 339

(For: JS115, JS130, JS145,)

The whole-body vibration emission under representative operating conditions (according to the intended use) are shown.

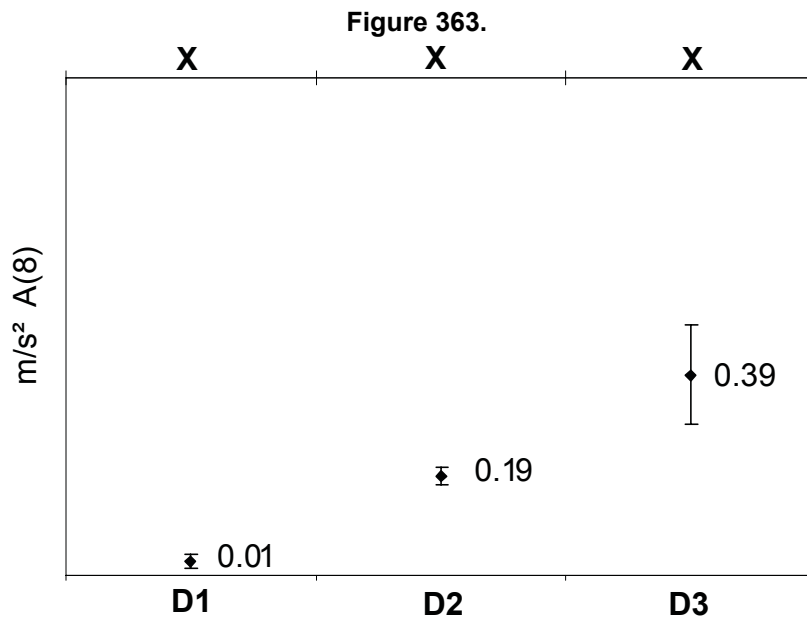


- X-Z** Dominant axis
- D1** Machine operating duty: Low idle
- D2** Machine operating duty: Excavating
- D3** Machine operating duty: Tracking (rough terrain)

The whole-body vibration emission calculated in accordance with ISO 2631-1:1997 for this machine type is 0.19m/s² normalised to an 8h reference period [A(8)] and based upon a test cycle defined in SAE J1166.

The hand-arm vibration calculated in accordance with the dynamic test conditions defined in ISO 5349-2: 2001 does not exceed 2.5m/s².

The errors bars are due to variations in vibration emissions due to measurement uncertainty (50% in accordance with EN 12096:1997).

(For: JS160, JS180, JS190)

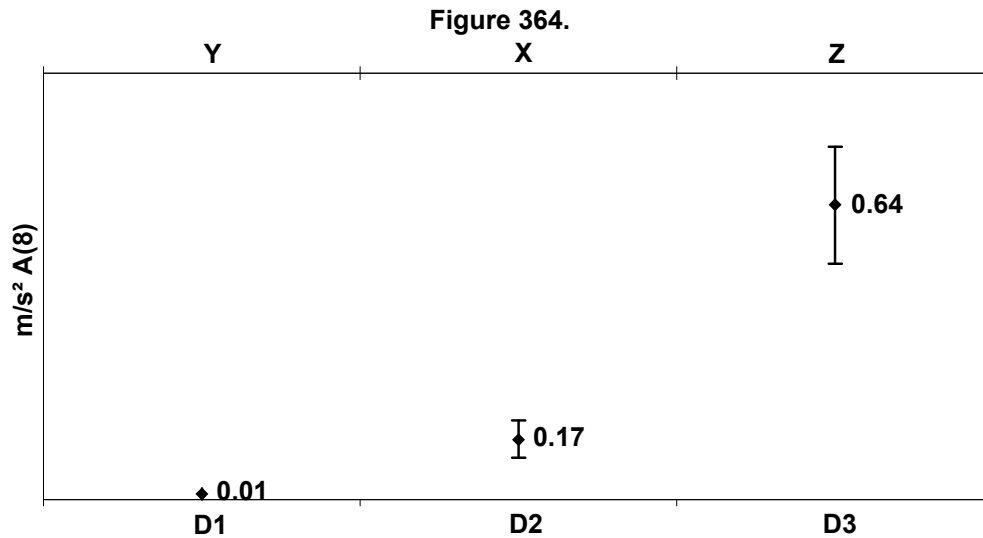

- X-Z** Dominant axis
- D1** Machine operating duty: Low idle
- D2** Machine operating duty: Excavating
- D3** Machine operating duty: Tracking (rough terrain)

The whole-body vibration emission under representative operating conditions (according to the intended use) are shown. Refer to Figure 364.


The whole-body vibration emission calculated in accordance with ISO 2631-1:1997 for this machine type is 0.17m/s² normalised to an 8h reference period [A(8)] and based upon a test cycle defined in SAE J1166.

The hand-arm vibration calculated in accordance with the dynamic test conditions defined in ISO 5349-2: 2001 does not exceed 2.5m/s².

The errors bars are due to variations in vibration emissions due to measurement uncertainty (50% in accordance with EN 12096:1997).

(For: JS330)

The whole-body vibration emission under representative operating conditions (according to the intended use) are shown.

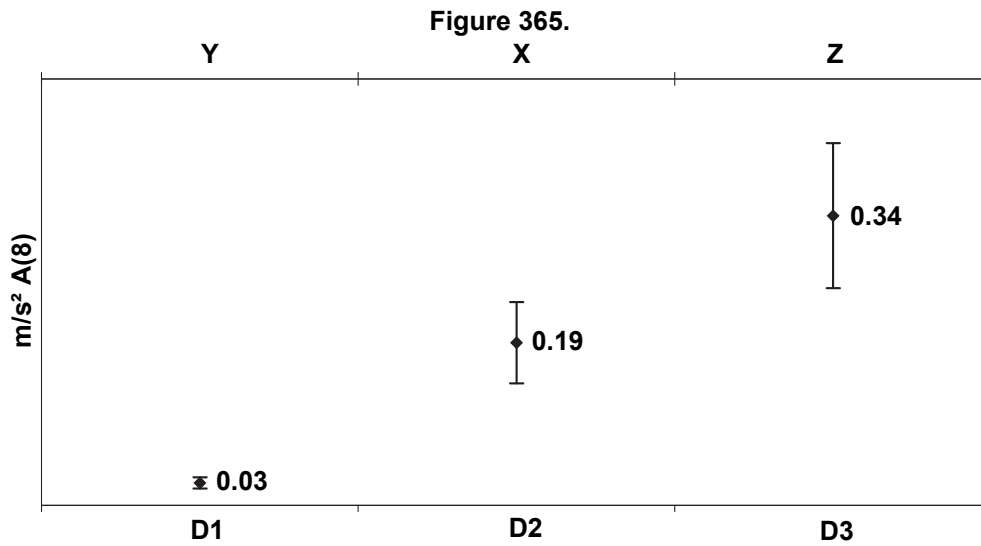


- X-Z** Dominant axis
- D1** Machine operating duty: Low idle
- D2** Machine operating duty: Excavating
- D3** Machine operating duty: Tracking (rough terrain)

The whole-body vibration emission calculated in accordance with ISO 2631-1:1997 for this machine type is 0.19m/s² normalised to an 8h reference period [A(8)] and based upon a test cycle defined in SAE J1166.

The hand-arm vibration calculated in accordance with the dynamic test conditions defined in ISO 5349-2: 2001 does not exceed 2.5m/s².

The errors bars are due to variations in vibration emissions due to measurement uncertainty (50% in accordance with EN 12096:1997).

(For: JS200, JS210, JS220, JS235)

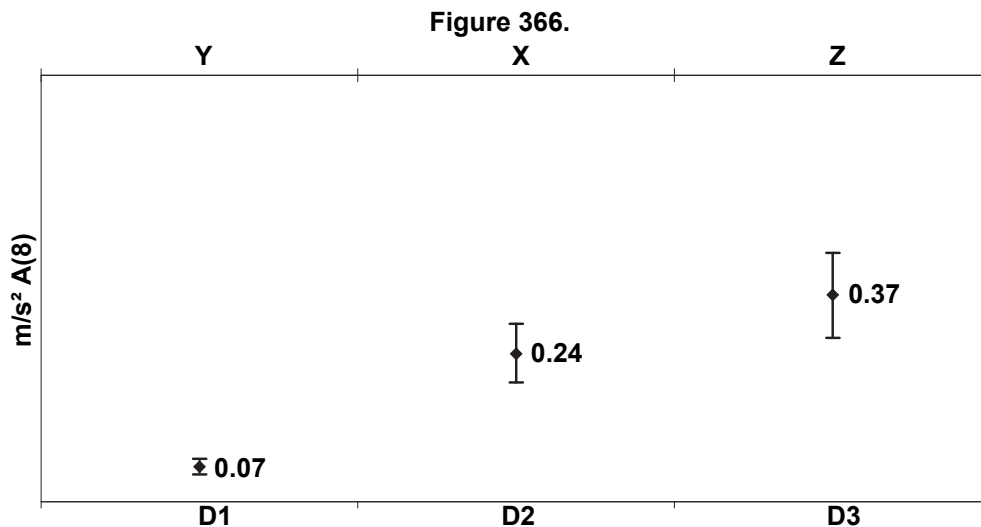

- X-Z** Dominant axis
- D1** Machine operating duty: Low idle
- D2** Machine operating duty: Excavating
- D3** Machine operating duty: Tracking (rough terrain)

The whole-body vibration emission under representative operating conditions (according to the intended use) are shown. Refer to Figure 366.


The whole-body vibration emission calculated in accordance with ISO 2631-1:1997 for this machine type is 0.24m/s^2 normalised to an 8h reference period $[A(8)]$ and based upon a test cycle defined in SAE J1166.

The hand-arm vibration calculated in accordance with the dynamic test conditions defined in ISO 5349-2: 2001 does not exceed 2.5m/s^2 .

The errors bars are due to variations in vibration emissions due to measurement uncertainty (50% in accordance with EN 12096:1997).

(For: JS360)

The whole-body vibration emission under representative operating conditions (according to the intended use) are shown.

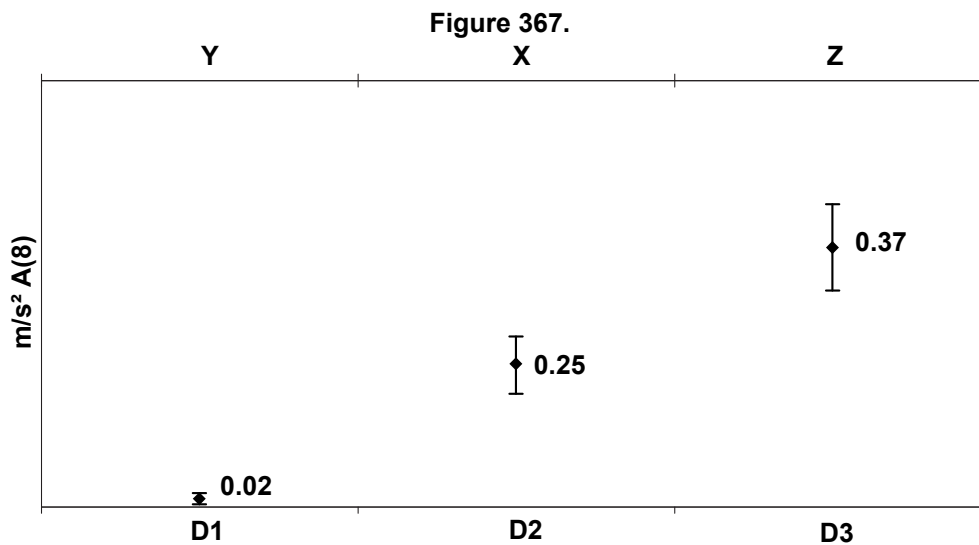

- X-Z** Dominant axis
- D1** Machine operating duty: Low idle
- D2** Machine operating duty: Excavating
- D3** Machine operating duty: Tracking (rough terrain)

The whole-body vibration emission calculated in accordance with ISO 2631-1:1997 for this machine type is 0.25m/s^2 normalised to an 8h reference period $[A(8)]$ and based upon a test cycle defined in SAE J1166.

The hand-arm vibration calculated in accordance with the dynamic test conditions defined in ISO 5349-2: 2001 does not exceed 2.5m/s^2 .

The errors bars are due to variations in vibration emissions due to measurement uncertainty (50% in accordance with EN 12096:1997).

Fluids, Lubricants and Capacities

General

For: JS115, JS130, JS145,	Page 340
For: JS160, JS180, JS190	Page 340
For: JS330, JS360	Page 341
For: JS200, JS210, JS220, JS235	Page 342

(For: JS115, JS130, JS145,)

JCB recommend that you use the JCB lubricants shown as they have been verified by JCB for use on JCB machines. However, you could use other lubricants that are equivalent to the JCB standards and quality or offer the same machine component protection.

Table 1. Fluids, Lubricants and Capacities

Item	Capacity	Fluid/Lubricant	JCB Part Number	Container Size ⁽¹⁾
Fuel Tank	253L	Diesel	-	-
Engine (Oil) ⁽²⁾	20.4L	Above -10°C (14°F): JCB Engine Oil EP 15W/40	4001/1805	20L
		-20°C (-4°F) to 50°C (122°F): JCB Cold Climate Engine Oil EP 5W40	4001/2705	20L
Cooling System	19.7L	JCB Antifreeze HP/Coolant	4006/1120	20L
Track Gearbox (each)	3.5L	JCB HD90 Gear Oil	4001/0305	20L
Slew Gearbox	2.2L	JCB HD90 Gear Oil	4000/0305	20L
Track Rollers and Idler Wheels		JCB HD90 Gear Oil	4000/0305	20L
Recoil Spring Cylinder		JCB Special HP Grease	4003/2017	0.4kg
Hydraulic System	124L	JCB Hydraulic Fluid HP32-20°C (-4°F) to 15°C (59°F)	4002/1024	200L
		JCB Hydraulic Fluid HP46-10°C (14°F) to 30°C (86°F)	4002/0803	200L
		JCB Hydraulic Fluid HP680°C (32°F) to 40°C (104°F)	4002/0701	200L
Slew Ring Bearings	0.06kg	JCB Special HP Grease	4003/2017	0.4kg
Slew Ring Gear Teeth	11kg	JCB Special HP Grease	4003/2006	12.5kg
All Other Grease	As required	JCB Special HP Grease	4003/2017	0.4kg

(1) For information about the different container sizes that are available (and their part numbers), contact your local JCB dealer.

(2) Do not use ordinary engine oil.

(For: JS160, JS180, JS190)

JCB recommend that you use the JCB lubricants shown as they have been verified by JCB for use on JCB machines. However, you could use other lubricants that are equivalent to the JCB standards and quality or offer the same machine component protection.

Table 2. Fluids, Lubricants and Capacities

Item	Capacity	Fluid/Lubricant	JCB Part Number	Container Size ⁽¹⁾
Fuel Tank	253L	Diesel	-	-
Engine (Oil) ⁽²⁾	20.4L	-10°C (14°F) to 50°C (121.9°F): JCB Engine Oil EP 15W/40	4001/1805	20L



Item	Capacity	Fluid/Lubricant	JCB Part Number	Container Size ⁽¹⁾
		-20°C (-4°F) to 50°C (122°F): JCB Cold Climate Engine Oil EP 5W40	4001/2705	20L
Cooling System	19.7L	JCB Antifreeze HP/Coolant	4006/1120	20L
Track Gearbox (each)	4.4L	JCB HD90 Gear Oil	4001/0301	5L
Slew Gearbox	6L	JCB HD90 Gear Oil	4000/0305	20L
Track Rollers and Idler Wheels		JCB HD90 Gear Oil	4000/0305	20L
Recoil Spring Cylinder		JCB Special HP Grease	4003/2017	0.4kg
Hydraulic System	142L	JCB Hydraulic Fluid HP32-20°C (-4°F) to 15°C (59°F)	4002/1024	200L
		JCB Hydraulic Fluid HP46-10°C (14°F) to 30°C (86°F)	4002/0803	200L
		JCB Hydraulic Fluid HP680°C (32°F) to 40°C (104°F)	4002/0701	200L
Slew Ring Bearings	0.075kg	JCB Special HP Grease	4003/2017	0.4kg
Slew Ring Gear Teeth	11kg	JCB Special HP Grease	4003/2006	12.5kg
All Other Grease	As required	JCB Special HP Grease	4003/2006	12.5kg

(1) For information about the different container sizes that are available (and their part numbers), contact your local JCB dealer.

(2) Do not use ordinary engine oil.

(For: JS330, JS360)

JCB recommend that you use the JCB lubricants shown as they have been verified by JCB for use on JCB machines. However, you could use other lubricants that are equivalent to the JCB standards and quality or offer the same machine component protection.

Table 3. Fluids, Lubricants and Capacities

Item	Capacity	Fluid/Lubricant	JCB Part Number	Container Size ⁽¹⁾
Fuel Tank	590L	Diesel	-	-
Engine (Oil) ⁽²⁾	25L	JCB Ultimate Performance 15W40 API CJ-4, ACEA E6, E9, JASO DH-2 ⁽³⁾	4001/2905	20L
Cooling System	45L	JCB Antifreeze HP/Coolant	4006/1120	20L
Track Gearbox (each)	5L	JCB HD90 Gear Oil	4001/0301	5L
Slew Gearbox	14.5L	JCB HD90 Gear Oil	4000/0305	20L
Track Rollers and Idler Wheels		JCB HD90 Gear Oil	4000/0305	20L
Recoil Spring Cylinder		JCB Special HP Grease	4003/2017	0.4kg
Hydraulic System	430L	JCB Hydraulic Fluid HP32-20°C (-4°F) to 15°C (59°F)	4002/1024	200L
		JCB Hydraulic Fluid HP46-10°C (14°F) to 30°C (86°F)	4002/0803	200L
		JCB Hydraulic Fluid HP680°C (32°F) to 40°C (104°F)	4002/0701	200L
Slew Ring Bearings		JCB Special HP Grease	4003/2017	0.4kg



Item	Capacity	Fluid/Lubricant	JCB Part Number	Container Size ⁽¹⁾
Slew Ring Gear Teeth		JCB Special HP Grease	4003/2017	0.4kg
All Other Grease	As required	JCB Special HP Grease	4003/2006	12.5kg

(1) For information about the different container sizes that are available (and their part numbers), contact your local JCB dealer.

(2) Do not use ordinary engine oil.

(3) Failure to use oil of the correct specification will decrease the life of the engine and the diesel particulate filter.

(For: JS200, JS210, JS220, JS235)

JCB recommend that you use the JCB lubricants shown as they have been verified by JCB for use on JCB machines. However, you could use other lubricants that are equivalent to the JCB standards and quality or offer the same machine component protection.

Table 4. Fluids, Lubricants and Capacities

Item	Capacity	Fluid/Lubricant	JCB Part Number	Container Size ⁽¹⁾
Fuel Tank	343L	Diesel	-	-
Engine (Oil) ⁽²⁾	17.5L	-10°C (14°F) to 50°C (121.9°F) JCB Engine Oil EP 15W/40	4001/1805	20L
		-20°C (-4°F) to 50°C (122°F): JCB Cold Climate Engine Oil EP 5W40	4001/2705	20L
Cooling System	28L	JCB Antifreeze HP/Coolant	4006/1120	20L
Track Gearbox (each)	4.7L	JCB HD90 Gear Oil	4001/0301	5L
Slew Gearbox	5L	JCB HD90 Gear Oil	4000/0305	20L
Track Rollers and Idler Wheels		JCB HD90 Gear Oil	4000/0305	20L
Recoil Spring Cylinder		JCB Special HP Grease	4003/2017	0.4kg
Hydraulic System	200L	JCB Hydraulic Fluid HP32-20°C (-4°F) to 15°C (59°F)	4002/1024	200L
		JCB Hydraulic Fluid HP46-10°C (14°F) to 30°C (86°F)	4002/0803	200L
		JCB Hydraulic Fluid HP680°C (32°F) to 40°C (104°F)	4002/0701	200L
Slew Ring Bearings	0.1kg	JCB Special HP Grease	4003/2017	0.4kg
Slew Ring Gear Teeth	17kg	JCB Special HP Grease	4003/2006	12.5kg
All Other Grease	As required	JCB Special HP Grease	4003/2006	12.5kg

(1) For information about the different container sizes that are available (and their part numbers), contact your local JCB dealer.

(2) Do not use ordinary engine oil.

Fuel

For: JS115, JS130, JS145, JS160, JS180, JS190, JS200, JS210, JS220, JS235, Page 343
 For: JS330, JS360 Page 346

(For: JS115, JS130, JS145, JS160, JS180, JS190, JS200, JS210, JS220, JS235,)

Acceptable and Unacceptable Fuels

▲ Notice: No warranty liability whatsoever will be accepted for failure of fuel injection equipment where the failure is attributed to the quality and grade of the fuel used.

Warning! Do not use petrol in this machine. Do not mix petrol with the diesel fuel. In storage tanks the petrol will rise to the top and form flammable vapours.

Fuel Groups

The major world fuels standards are divided into four categories. Those that are fully accepted as suitable fuels, those that are acceptable from a "warranty" point of view, but may have undesirable effects on the expected life of the engine performance changes from original specification, those that will lead to reduce the expected life, and lastly those that are viewed as unacceptable for use (fuels shown on the same line as each other are considered equivalents).

The lists below are not exhaustive of all diesel fuel standards encountered in the marketplace. If comment is required on the suitability of fuel standards not on the list, requests with, if possible, specification details showing at least the key characteristics described above should be forwarded to JCB Service for assessment and comment.

Table 1. Group 1

Fuel	Advice	Service Requirements
EN590 Diesel fuel types - Auto/C0/C1/C2/C3/C4	Preferred and may be used with no restrictions or conditions.	For fuel with unspecified parameters, EN590 values apply. Fuel grades within each standard must be appropriate to the ambient temperature. The appropriate level of fuel cleanliness at the FIE inlet after filtration has to be ensured by the customer.
BS2869 Class A2		
ASTM D975-076 2-D, US DF1, US DF2, US DFA		
JIS K2204 Grades 1, 2, 3 and Special Grade 3		

(1) See your JCB dealer for advice on service requirements.

Table 2. Group 2

Fuel	Advice	Service Requirements
Group1 fuels with HFFR WSD in the range 460 to 520	Not preferred and may be used but may lead to reduced FIE life and / or loss of performance.	
ASTM D975-91 Class 1-1DA		
B20 Biodiesels can cause serious problems for engines. JCB Ecomax Stage 3b / Tier 4i engines have been developed to run with biodiesels up to 20 mix (B20), but NOT with higher biodiesel proportion. The biodiesel content of this mix must be to ASTM D6751, DIN 51606, or ISO 14214 standards. Using a B20 blend of biodiesel requires caution and additional servicing of the engine is required. ⁽¹⁾		The Ecomax dealer, or JCB Power Systems Applications department, should be consulted for further guidance. Biodiesel is very problematic to store; fuel in storage has to be very carefully managed to ensure that it does not deteriorate during this period. No warranty liability will be accepted for failure of fuel injection equipment where the failure is attributed to the quality and grade of the fuel used.

(1) See your JCB dealer for advice on service requirements.

Table 3. Group 3

Fuel	Advice
AVTUR FS11 (NATO F34, JP8, MIL T83133, DEF STAN 91-87, DERD 2463)	Not preferred and may be used only with appropriate additives and will lead to reduced FIE life and / or loss of performance.
AVCAT FS11 (NATO F44, JP5, MIL T5624, DERD 2452, AVTOR))	
JET A1 (NATO F35, DEF STAN 91-91, DERD 2494)	
AVCAT (NATO F43, JP5 without additives)	
JET A (ASTM D1655)	
ASTM D3699 Kerosene	
JP7 (MIL T38219 XF63)	
NATO F63	

(1) See your JCB dealer for advice on service requirements.

Table 4. Group 4

Fuel	Advice
Unmodified Vegetable Oils and Biodiesels over 20concentration	Unacceptable

(1) See your JCB dealer for advice on service requirements.

Additives

The additives listed below are advertised as being suitable for bringing the lubricity levels of kerosene/low sulphur fuels up to those of diesel fuels.

These products are given as examples only. The information is derived from the manufacturers data. The products are not recommended or endorsed by JCB. Contact your JCB dealer for further advice.

- Elf 2S 1750. Dosage 1000-1500 ppm (0.1% to 0.15%), specifically for Indian Superior Kerosene (SKO) but may be applicable to other fuels.
- Lubrizol 539N. Dosage (on Swedish low sulphur fuel) 250 ppm.
- Paradyne 7505 (from Infineum). Dosage 500 ppm (0.05%).

These products are given as examples only. The information is derived from the manufacturers data. The products are not recommended or endorsed by JCB.

Service Requirements for use of B20 Biodiesel

- The engine oil must be a grade CH4 as minimum specification.
- Do not leave unused B20 biodiesel in the fuel tank for extended periods (top up each day).
- Make sure that 1 in 5 fuel tank fills use standard diesel to EN590 specification, this will help to prevent 'gumming'.
- Make sure regular oil sampling is completed (look for excessive unburnt fuel content, water or wear particles).
- Change the engine oil and filter more frequently (as a minimum half the recommended intervals), or as indicated by oil sampling.
- Change the fuel filters more frequently (as a minimum half the recommended intervals), or if there are engine performance related issues..
- Make sure the fuel is stored correctly, care must be taken to make sure no water enters the machine fuel tank (or the storage tank). Water will encourage micobacterial growth.
- Make sure that the fuel pre-filter is drained daily (not every week as currently advised).
- Use heater kits in low ambient temperature territories.
- The biodiesel must meet the following standards: ASTM D6751, DIN 51606, ISO 14214.

If necessary use a test kit to confirm the fuel specification. Testing kits are available (not from JCB currently), use the internet as a source for the kits.

If performance related issues are to be reported to JCB Service, and the engine has been run on biodiesel, then the fuel system must be filled with standard diesel (at least 2 x tank fills) to EN590 specification and relevant stall speeds recorded prior to making the report.

Warranty

JCB have shown a commitment to support the environment by approving the use of biodiesel blended fuels.

Using a B5 blend of biodiesel requires caution and additional servicing of the engine is required.

Failure to follow the additional recommended service requirements may lead to a warranty claim being declined.

Failures resulting by the incorrect use of biodiesels or other fuel additives are not defects of the engine workmanship and therefore will not be supported by JCB Warranty.

Usage and Effects of Fuels

The information that follows does not indicate types of fuel that are acceptable or unacceptable.

Acceptable Fuels

Ultra Low Sulphur Diesel (EN590)

Available throughout the UK, Europe and North America since March 1999. This fuel has a maximum sulphur content of 0.001% (0.0015% in North America) by weight and a further reduction in the natural lubricity and aromatic content than experienced with low sulphur diesel. Major oil producers will add lubrication improvers and also maintain the total aromatic content to an acceptable level.

B20 Biodiesel

Biodiesel refers to pure fuel before it is blended with diesel fuel. When biodiesel is blended with diesel fuel it is referred to as B5, B20 etc., where the number indicates the percentage of biodiesel in the fuel, for example B5 contains 5% biodiesel.

Biodiesel has different characteristics than mineral based fuels, this could lead to seals swelling, fuel system corrosion and seal damage.

Biodiesels will 'cloud' at higher temperatures than mineral based fuels. To explain Cloud Point - the lowest temperature at which fluid can flow and performs its functions is referred to as Pour Point. Just prior to reaching its Pour Point the diesel fluid becomes 'cloudy' due to crystallization of waxy constituents - this is known as Cloud Point. Using diesel at temperature below its cloud point can result in filter clogging. To prevent this happening preheating will be required.

Using B20 biodiesel can result in unburnt fuels accumulating in the engine oil, ultimately this can affect the engine oil efficiency and lead to engine damage (with standard diesel any unburnt fuel evaporates off the lubricating oil).

The natural properties of biodiesel make it a good medium for micro bacterial growth, these microbes can cause fuel system corrosion and early fuel filter blocking. Biodiesels must be stored to exclude water absorption and oxidation. It will be necessary to consult and seek advice from your fuel supplier, the effectiveness of conventional antibacterial additives when used in biodiesel is still being investigated in the fuel industry. A high percentage biodiesel mixture (>20%) can lead to fuel gelling and filter blocking in low temperature operation, it may also effect the power and performance of the engine.

To minimise the risk of engine damage when using a B20 mix, there are additional service requirements.

If the recommended actions are not taken there may be the following consequences:- low temperature filter clogging- injectors lacquering / sticking deterioration of seals and rubber hoses- corrosion of metal parts in the fuel system- engine performance problems. These risks will be increased if the fuel has been poorly stored, that is deteriorated through oxidation and / or water absorption.

Unacceptable Fuels

B100 - Chemically Modified Vegetable Oils (FAME/ VOME)

These fuels have been derived from a wide range of vegetable oils and animal fats, resulting in better stability, viscosity and cetane number than those produced from unmodified vegetable oils, but it is recognised that there are potential problems associated with the finished fuel characteristics. These oils are less stable than mineral oil derived fuels when stored and they will readily degrade producing fatty acids, methanol and water, none of which are desirable in the FIE. These effects are known to be accelerated when the fuel is stored in the presence of air and water together.

An extract 'common statement' from the FIE manufactures specifies that "The fuel injection equipment manufacturers can accept no liability whatsoever for failure attributable to operating their products with fuels for which the products were not designed, and no warranties or representations are made as to the possible effects of running these products with such fuels".

Unmodified Vegetable Oils

Burned in diesel engines neat or used as an extender to mineral derived fuel. When these are subjected to heat in the fuel injection system they form sticky deposits that can be found inside the fuel pump and a hard lacquer in the injectors where exposure to even higher temperatures takes place.

Sulphur Content

▲ Caution! A combination of water and sulphur will have a corrosive chemical effect on fuel injection equipment. It is essential that water is eradicated from the fuel system when high sulphur fuels are used.

Effects of Fuel Contaminates

The effect of dirt, water and other contaminants in diesel can be disastrous for injection equipment:

Dirt

A severely damaging contaminant. Finely machined and mated surfaces such as delivery valves and distributor rotors are susceptible to the abrasive nature of dirt particles - increased wear will almost inevitably lead to greater leakage, uneven running and poor fuel delivery.

Water

Water can enter fuel through poor storage or careless handling, and will almost inevitably condense in fuel tanks. The smallest amounts of water can result in effects that are just as disastrous to the fuel injection pump as dirt, causing rapid wear, corrosion and in severe cases, even seizure. It is vitally important that water is prevented from reaching the fuel injection equipment. The filter/water trap must be drained regularly.

Wax

Wax is precipitated from diesel when the ambient temperature falls below that of the fuel's cloud point, causing a restriction in fuel flow resulting in rough engine running. Special winter fuels may be available for engine operation at temperatures below 0°C (32.0°F). These fuels have a lower viscosity and limit wax formation.

Chemical Contamination

It should be noted that exposure of fuel to surfaces containing Copper (Cu), Zinc (Zn) or Lead (Pb) can adversely affect fuel quality and should be minimised.

(For: JS330, JS360)

Types of Fuel

Use good quality diesel fuel to get the correct power and performance from your engine.

Recommended Fuel Specification

- EN590 Diesel Fuel Types - Auto/Co/C1/C2/C3/C4.
- BS2869 Class A2.
- ASTM D975-91 Class 2-2DA, US DF1, US DF2, US DFA.
- JIS K2204 (1992) Grades 1, 2, 3 and Special Grade 3.

Additives

Where low sulfur/low aromatic fuels are used it is important that lubricity additives are used. The additives listed below are advertised as being suitable for bringing the lubricity levels of kerosene/low sulfur fuels up to those of diesel fuels. They have not been tested or approved by the engine manufacturer. They should be added by your fuel supplier who should understand the concentration level necessary.

These products are given as examples only. The information is derived from the manufacturers data. The products are not recommended or endorsed by JCB. Contact your JCB dealer for further advice.

- Elf 2S 1750. Dosage 1000-1500 ppm (0.1 - 0.15%), specifically for Indian Superior Kerosene (SKO) but may be applicable to other fuels.
- Lubrizol 539N. Dosage (on Swedish low sulphur fuel) 250 ppm.
- Paradyne 7505 (from Infineum). Dosage 500 ppm (0.05%).

Acceptable Fuel Specification

The fuel specification below is acceptable, however this fuel may reduce the life of the fuel injection equipment. The use of this fuel may also affect the engine performance.

- ASTM D975-91 Class 1-1DA.
- JP7, MIL T38219 XF63.
- NATO F63.

Sulphur Content

▲ Caution! A combination of water and sulphur will have a corrosive chemical effect on fuel injection equipment. It is essential that water is eradicated from the fuel system when high sulphur fuels are used.

High sulfur content can cause engine wear. (High sulfur fuel is not normally found in North America, Europe or Australia.) If you have to use high sulfur fuel you must change the engine oil more frequently.

Table 5.

Percentage of sulfur in the fuel (%)	Oil change interval
Less than 0.5	Normal
0.5 to 1.0	0.75 of normal
More than 1.0	0.50 of normal

Aviation Kerosene Fuels

Aviation kerosene fuels are not approved and their use may cause damage to components. Warranty will not be allowed on any component where damage is found to have been caused by the use of aviation kerosene.

Low Temperature Fuels

Special winter fuels may be available for engine operation at temperatures below 0°C (32.0°F). These fuels have a lower viscosity. They also limit wax formation in the fuel at low temperatures (Wax forming in the fuel can stop the fuel flowing through the filter).

Fatty Acid Methyl Ester Fuels as a Replacement for diesel Fuels

Fuel resources such as Rape Methyl Ester and Soybean Methyl ester, collectively known as Fatty Acid Methyl.

Coolant

▲ **Caution!** Antifreeze can be harmful. Obey the manufacturer's instructions when handling full strength or diluted antifreeze.

Check the strength of the coolant mixture at least once a year, preferably at the start of the cold period.

Replace the coolant mixture according to the intervals shown in the machine's Service Schedule.

You must dilute full strength antifreeze with clean water before use. Use clean water of no more than a moderate hardness (pH value 8.5). If this cannot be obtained, use de-ionized water. For further information advice on water hardness, contact your local water authority.

The correct concentration of antifreeze protects the engine against frost damage in winter and provides year round protection against corrosion.

The protection provided by JCB High Performance Antifreeze and Inhibitor is shown below.

Table 1.

Concentration	Level of protection
50% (Standard)	Protects against damage down to -40°C (-40°F)
60% (Extreme Conditions Only)	Protects against damage down to -56°C (-69°F)

Do not exceed a 60% concentration, as the freezing protection provided reduces beyond this point.

If you use any other brand of antifreeze:

- Make sure that the antifreeze complies with International Specification ASTM D6210
- Always read and understand the manufacturer's instructions
- Make sure that a corrosion inhibitor is included. Serious damage to the cooling system can occur if corrosion inhibitors are not used
- Make sure that the antifreeze is ethylene glycol based and does not use Organic Acid Technology (OAT).

Torque Values

General

For: JS115	Page 349
For: JS130,	Page 352
For: JS145	Page 354
For: JS160	Page 356
For: JS180	Page 358
For: JS190	Page 360
For: JS330	Page 362
For: JS360	Page 364
For: JS200	Page 366
For: JS220, JS235	Page 368
For: JS210	Page 370

(For: JS115)

JS115 and Variants

Before and after daily work, check for loose or missing nuts and bolts. Tighten if loose and replace if missing.

Tighten the nuts and bolts after the first 50h of the running-in stage and then every 250h.

Tighten the nuts and bolts, Refer to Table 1.

For the tightening torques of the bolts and nuts not listed, Refer to Table 2.

Table 1.

	Tightening Point	Bolt Diameter	Wrench (mm)	Tightening Torque (N.m)	Checking Torque (N.m)
1 ⁽¹⁾	Travel motor	M16	24	290	265
2 ⁽¹⁾	Drive sprocket	M16	24	290	265
3 ⁽¹⁾	Idler wheel	M16	24	290	265
4 ⁽¹⁾	Upper (carrier) roller	M16/M20	24/30	290/550	265/515
5 ⁽¹⁾	Lower (track) roller	M16	24	290	265
6 ⁽¹⁾	Track guard	M16	24	290	265
7	Shoe bolt	M16	24	382-440	344-396
8	Counterweight	M27	41	925	840
9 ⁽¹⁾	Turntable bearing (under-carriage)	M16/M20	24/30	296/525	275/470
10 ⁽¹⁾	Turntable bearing (slew frame)	M16/M20	24/30	296/525	275/470
11 ⁽¹⁾	Slew equipment	M16/M20	24/30	290/550	265/515
12 ⁽¹⁾	Engine (engine mount)	M16	24	290	265
13 ⁽¹⁾	Engine bracket	M10/M12	17/19	68/118	62/107
14	Radiator	M12	19	104	94
15 ⁽¹⁾	Hydraulic pump	M10	17	60	54
16 ⁽¹⁾	Hydraulic oil tank	M16	24	250	225
17 ⁽¹⁾	Fuel tank	M16	24	250	225
18 ⁽¹⁾	Control valve	M16	24	290	265
19	Battery	M6	10	7	6


	Tightening Point	Bolt Diameter	Wrench (mm)	Tightening Torque (N.m)	Checking Torque (N.m)
20 ⁽¹⁾	Rotary coupling	M12	19	116	105
21	Cab	M16	24	132	125

(1) Use JCB Threadlocker and sealer (High Strength) and tighten to the torque listed.

Table 2.

Bolt Diameter (size)			M6	M8	M10	M12	M14	M16	M18	M20
Hex. bolt	Wrench	(mm)	10	13	17	19	22	24	27	30
	Tightening torque	(N.m)	12.5	30	60	104	167	259	506	874
Hex. socket head bolt	Wrench	(mm)	5	6	8	10	12	14	16	17
	Tightening torque	(N.m)	15	36	72	125	200	311	-	607

Figure 368.

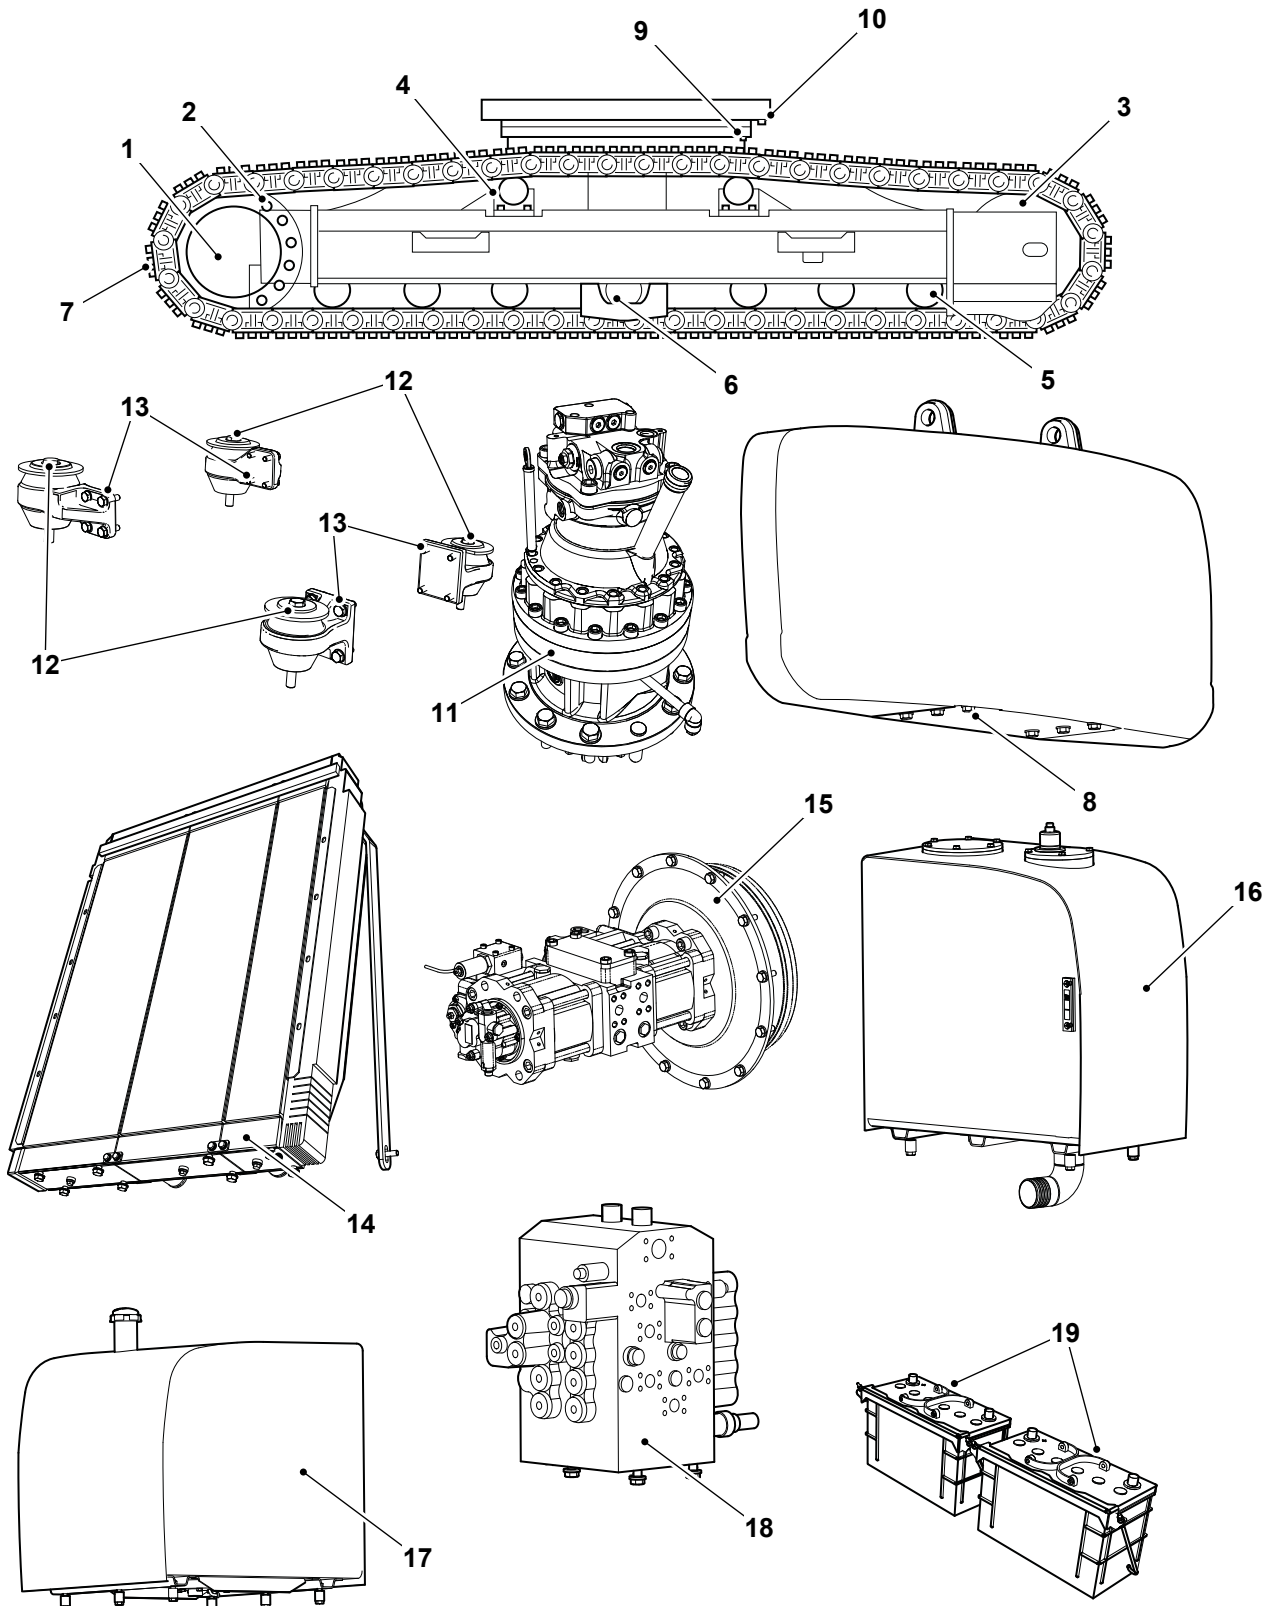

(For: JS130,)

JS130 and Variants

Before and after daily work, check for loose or missing nuts and bolts. Tighten if loose and replace if missing.

Tighten the nuts and bolts after the first 50h of the running-in stage and then every 250h.

Tighten the nuts and bolts, Refer to Table 3.

For the tightening torques of the nuts and bolts not listed, Refer to Table 4.

Table 3.


	Tightening Point	Bolt Diameter	Wrench (mm)	Tightening Torque (N.m)	Checking Torque (N.m)
1 ⁽¹⁾	Travel motor	M16	24	290	265
2 ⁽¹⁾	Drive sprocket	M16	24	290	265
3 ⁽¹⁾	Idler wheel	M16	24	290	265
4 ⁽¹⁾	Upper (carrier) roller	M16/M20	24/30	290/550	265/515
5 ⁽¹⁾	Lower (track) roller	M16	24	290	265
6 ⁽¹⁾	Track guard	M16	24	290	265
7	Shoe bolt	M16	24	382-440	344-396
8	Counterweight	M27	41	925	840
9 ⁽¹⁾	Turntable bearing (under-carriage)	M16/M20	24/30	296/525	275/470
10 ⁽¹⁾	Turntable bearing (slew frame)	M16/M20	24/30	296/525	275/470
11 ⁽¹⁾	Slew equipment	M16/M20	24/30	290/550	265/515
12 ⁽¹⁾	Engine (engine mount)	M16	24	290	265
13 ⁽¹⁾	Engine bracket	M10/M12	17/19	68/118	62/107
14	Radiator	M12	19	104	94
15 ⁽¹⁾	Hydraulic pump	M10	17	60	54
16 ⁽¹⁾	Hydraulic oil tank	M16	24	250	225
17 ⁽¹⁾	Fuel tank	M16	24	250	225
18 ⁽¹⁾	Control valve	M16	24	290	265
19	Battery	M6	10	7	6
20 ⁽¹⁾	Rotary coupling	M12	19	116	105
21	Cab	M16	24	132	125

(1) Use JCB Threadlocker and sealer (High Strength) and tighten to the torque listed.

Table 4.

Bolt Diameter (size)			M6	M8	M10	M12	M14	M16	M18	M20
Hex. bolt	Wrench	(mm)	10	13	17	19	22	24	27	30
	Tightening torque	(N.m)	12.5	30	60	104	167	259	506	874
Hex. socket head bolt	Wrench	(mm)	5	6	8	10	12	14	16	17
	Tightening torque	(N.m)	15	36	72	125	200	311	-	607

Figure 369.

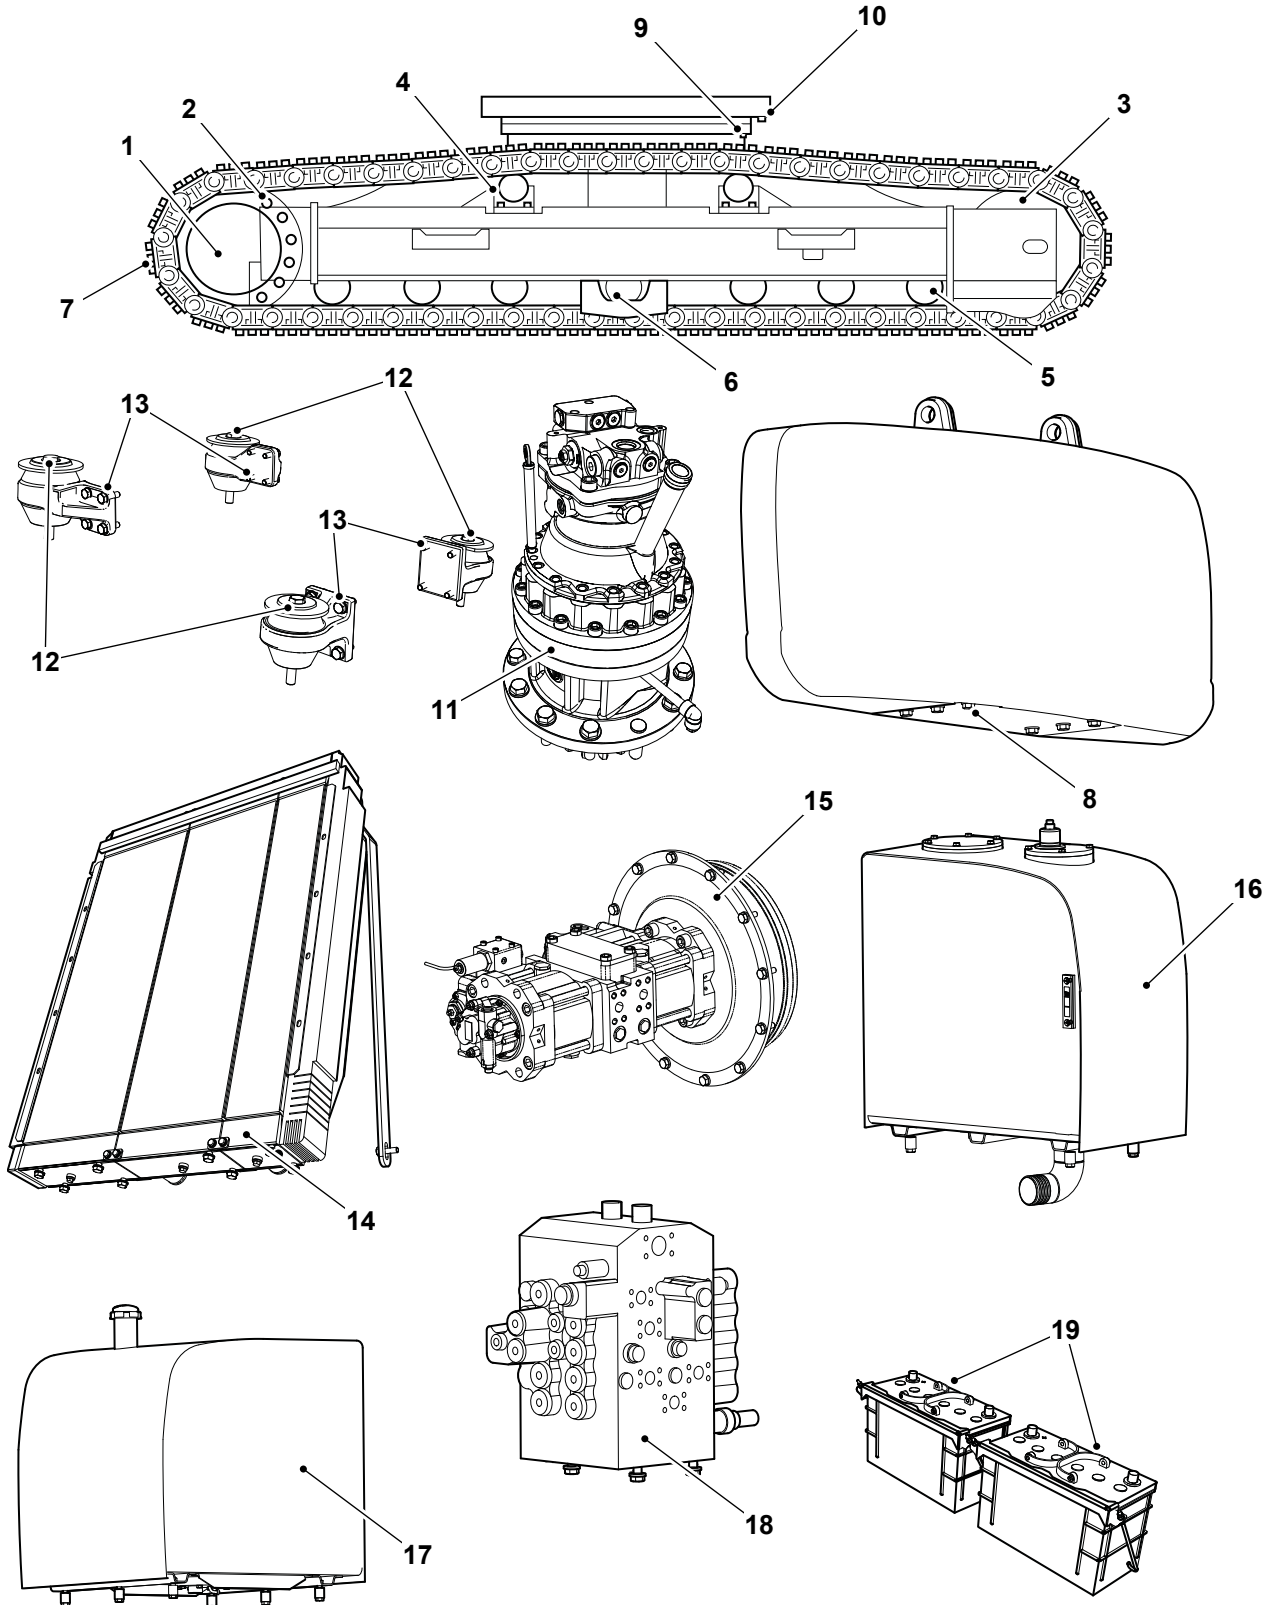

(For: JS145)

JS145 and Variants

Before and after daily work, check for loose or missing nuts and bolts. Tighten if loose and replace if missing.

Tighten the nuts and bolts after the first 50h of the running-in stage and then every 250h.

Tighten the nuts and bolts, Refer to Table 5.

For the tightening torques of the bolts and nuts not listed, Refer to Table 6.

Table 5.

	Tightening Point	Bolt Diameter	Wrench (mm)	Tightening Torque (N.m)	Checking Torque (N.m)
1 ⁽¹⁾	Travel motor	M16	24	290	265
2 ⁽¹⁾	Drive sprocket	M16	24	290	265
3 ⁽¹⁾	Idler wheel	M16	24	290	265
4 ⁽¹⁾	Upper (carrier) roller	M16/M20	24/30	290/550	265/515
5 ⁽¹⁾	Lower (track) roller	M16	24	290	265
6 ⁽¹⁾	Track guard	M16	24	290	265
7	Shoe bolt (JS145)	M16	24	363-421	327-379
7	Shoe bolt (JS145HD)	M20	27	643-757	579-681
8	Counterweight	M27	41	925	840
9 ⁽¹⁾	Turntable bearing (under-carriage)	M16/M20	24/30	296/525	275/470
10 ⁽¹⁾	Turntable bearing (slew frame)	M16/M20	24/30	296/525	275/470
11 ⁽¹⁾	Slew equipment	M16/M20	24/30	290/550	265/515
12 ⁽¹⁾	Engine (engine mount)	M16	24	290	265
13 ⁽¹⁾	Engine bracket	M10/M12	17/19	68/118	62/107
14	Radiator	M12	19	104	94
15 ⁽¹⁾	Hydraulic pump	M10	17	60	54
16 ⁽¹⁾	Hydraulic oil tank	M16	24	250	225
17 ⁽¹⁾	Fuel tank	M16	24	250	225
18 ⁽¹⁾	Control valve	M16	24	290	265
19	Battery	M6	10	7	6
20 ⁽¹⁾	Rotary coupling	M12	19	116	105
21	Cab	M16	24	132	125

(1) Use JCB Threadlocker and sealer (High Strength) and tighten to the torque listed.

Table 6.

Bolt Diameter (size)			M6	M8	M10	M12	M14	M16	M18	M20
Hex. bolt	Wrench	(mm)	10	13	17	19	22	24	27	30
	Tightening torque	(N.m)	12.5	30	60	104	167	259	506	874
Hex. socket head bolt	Wrench	(mm)	5	6	8	10	12	14	16	17
	Tightening torque	(N.m)	15	36	72	125	200	311	-	607



Download the full PDF manual instantly.

Our customer service e-mail:

aservicemanualpdf@yahoo.com